

LED TUBE T8 G3

APPLICATIONS : Office, Warehouse, Factory, Show Room, Hotel, Supermarket etc.




- ✓ HIGH QUALITY LED CHIP
- ✓ HIGH PERFORMANCE AND DURABLE
- ✓ ENERGY SAVING MORE THAN 50%
- ✓ LONG LIFE SPAN




SPECIFICATION

PRODUCT MODEL	T8-9N	T8-16N	T8-18N	T8-22N
POWER	9W	16W	18W	22W
LUMEN	1,200 LM	2,100 LM	2,400 LM	3,200 LM
LUMEN/WATT	133 LM/W	131 LM/W	133 LM/W	145 LM/W
INPUT VOLTAGE	AC100-240V, 50-60 HZ			
POWER FACTOR	PF > 0.95 +/- 2%			
OPERATION TEMPERATURE	'- 30°C TO 50°C			
COLOR TEMPERATURE (CCT)	3,000 - 6,500 K			
COLOR RENDERING (RA)	CRI > 80			
MATERIAL	ALUMINIUM + PC			
BEAM ANGLE	140°			
IP RATE	IP 30			
THDI (%)	< 15%			
LIFE TIME	50,000 HRS			
DIMENSION (AXØB MM)	600XØ26	1200XØ26	1200XØ26	1200XØ26
WEIGHT	180 G	300 G	300 G	300 G

DIMENSION

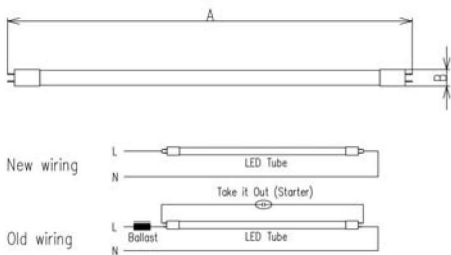

PHOTOMETRIC DATA



BEAM ANGLE 140°



LEDsave

LEDsave (THAILAND) CO.,LTD.

15/16 Moo18 Bangphli-Yai, Bangphli, Samutprakan 10540



TEL. 02-045-4768-9



www.facebook.com/LEDsave



admin@ledsave.co.th



FAX. 02-045-3884-5



@ledsave



www.ledsave.co.th



LINE : @LEDsave