

LED STREET LIGHT G3



APPLICATIONS : High Way, Factory, Plant, Garden, Car Park etc.




- ✓ HIGH QUALITY LED CHIP
- ✓ HIGH PERFORMANCE AND DURABLE
- ✓ ENERGY SAVING MORE THAN 50%
- ✓ LONG LIFE SPAN




SPECIFICATION

PRODUCT MODEL	ST03-30N	ST03-50N	ST03-60N	ST03-120N	ST03-150N
POWER	30W	50W	60W	120W	150W
LUMEN	4,560 LM	7,600 LM	9,120 LM	18,240 LM	22,800 LM
LUMEN/WATT	152 LM/W	152 LM/W	152 LM/W	152 LM/W	152 LM/W
INPUT VOLTAGE	AC100-277V, 50-60 HZ				
SURGE PROTECTION	SURGE IMMUNITY LINE-EARTH 12KV, LINE-LINE 6KV				
POWER FACTOR	PF > 0.95 +/- 2%				
OPERATION TEMPERATURE	-40°C TO 70°C				
COLOR TEMPERATURE (CCT)	3,000 - 6,500 K				
COLOR RENDERING (RA)	CRI > 80				
MATERIAL	ALUMINIUM				
BEAM ANGLE	ASYMMETRIC				
IP RATE	IP 65				
THDI (%)	< 10%				
LIFE TIME	50,000 HRS				
DIMENSION (AXBXCXD MM)	530X250X100XØ50	530X250X100XØ50	530X250X100XØ50	670X250X100XØ64	790X290X130XØ64
WEIGHT	3.3 KG	3.3 KG	3.3 KG	4.9 KG	9 KG

DIMENSION

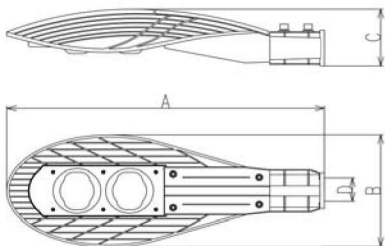

PHOTOMETRIC DATA



ASYMMETRIC



LEDsave

LEDsave (THAILAND) CO.,LTD.

15/16 Moo18 Bangphli-Yai, Bangphli, Samutprakan 10540

TEL. 02-045-4768-9

FAX. 02-045-3884-5

www.facebook.com/LEDsave

@ledsave

admin@ledsave.co.th

www.ledsave.co.th



LINE : @LEDsave