

LED HIGH MAST G3



APPLICATIONS : High Way, Golf Course, Plant, Containers Parking, Stadium, Mine etc.




- ✓ HIGH QUALITY LED CHIP
- ✓ HIGH PERFORMANCE AND DURABLE
- ✓ EXCELLENT HEAT SINK
- ✓ ENERGY SAVING MORE THAN 50%
- ✓ LONG LIFE SPAN




SPECIFICATION

PRODUCT MODEL	HM03-125N	HM03-250N	HM03-500N	HM03-800N	HM03-1000N	HM03-1500N
POWER	125W	250W	500W	800W	1000W	1500W
LUMEN	19,000 LM	38,000 LM	76,000 LM	121,600 LM	152,000 LM	228,000 LM
LUMEN/WATT	152 LM/W	152 LM/W	152 LM/W	152 LM/W	152 LM/W	152 LM/W
INPUT VOLTAGE	AC100-277V, 50-60 HZ					
SURGE PROTECTION	SURGE IMMUNITY LINE-EARTH 12KV, LINE-LINE 6KV					
POWER FACTOR	PF > 0.95 +/- 2%					
OPERATION TEMPERATURE	-40°C TO 70°C					
COLOR TEMPERATURE (CCT)	3,000 - 6,500 K					
COLOR RENDERING (RA)	CRI > 80					
MATERIAL	ALUMINIUM					
BEAM ANGLE	20° SPOT / 30° / 60°					
IP RATE	IP 65					
THDI (%)	< 15%					
LIFE TIME	50,000 HRS					
DIMENSION (AxBXC MM)	230X280X180	280X390X180	450X390X180	730X390X180	880X390X180	1310X390X180
WEIGHT	3.1 KG	5.8 KG	8.9 KG	14.2 KG	19 KG	27 KG

DIMENSION

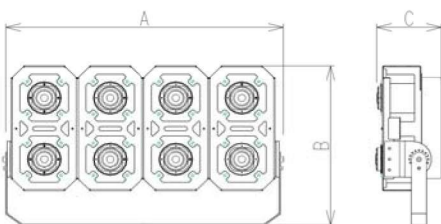

PHOTOMETRIC DATA

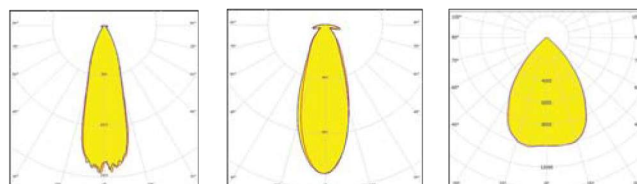

BEAM ANGLE 20° SPOT BEAM ANGLE 30° BEAM ANGLE 60°



LEDsave

LEDsave (THAILAND) CO.,LTD.

15/16 Moo18 Bangphli-Yai, Bangphli, Samutprakan 10540

TEL. 02-045-4768-9 www.facebook.com/LEDsave admin@ledsave.co.th

FAX. 02-045-3884-5 @ledsave www.ledsave.co.th



LINE : @LEDsave