

LED STREET LIGHT G4

APPLICATIONS : High Way, Factory, Plant, Garden, Car Park etc.



Design by Japanese




- ✓ HIGH QUALITY LED CHIP 169 LM/W
- ✓ HIGH PERFORMANCE AND DURABLE
- ✓ ENERGY SAVING MORE THAN 50%
- ✓ LONG LIFE SPAN




SPECIFICATION

PRODUCT MODEL	ST04-30N	ST04-60N	ST04-100N	ST04-120N	ST04-150N
POWER	30W	60W	100W	120W	150W
LUMEN	5,070 LM	10,140 LM	16,900 LM	20,280 LM	25,350 LM
LUMEN/WATT	169 LM/W	169 LM/W	169 LM/W	169 LM/W	169 LM/W
INPUT VOLTAGE	AC100-277V, 50-60 HZ				
SURGE PROTECTION	SURGE IMMUNITY LINE-EARTH 12KV, LINE-LINE 6KV				
POWER FACTOR	PF > 0.95 +/- 2%				
OPERATION TEMPERATURE	'- 40°C TO 70°C				
COLOR TEMPERATURE (CCT)	3,000 / 5,000 / 6,500 K				
COLOR RENDERING (RA)	CRI > 80				
MATERIAL	ALUMINIUM				
BEAM ANGLE	ASYMMETRIC				
IP RATE	IP 65				
THDI (%)	< 10%				
LIFE TIME	50,000 HRS				
DIMENSION (AXBXCXD MM)	530X250X100XØ50	530X250X100XØ50	670X250X100XØ64	670X250X100XØ64	670X250X100XØ64
WEIGHT	3.3 KG	3.3 KG	4.9 KG	4.9 KG	4.9 KG

DIMENSION

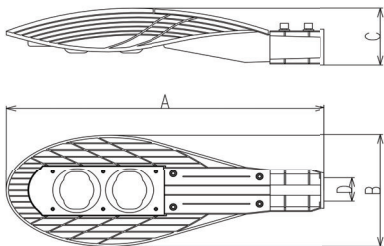

PHOTOMETRIC DATA



ASYMMETRIC



LEDsave

LEDsave (THAILAND) CO.,LTD.

15/16 Moo18 Bangphli-Yai, Bangphli, Samutprakan 10540

TEL. 02-045-4768-9

FAX. 02-045-3884-5

www.facebook.com/LEDsave

@ledsave

admin@ledsave.co.th

www.ledsave.co.th



LINE : @LEDsave